


Waveguide Circulator

Model No. AWC-079084-200



General Specifications

Frequency Range	7.9 - 8.4GHz
Isolation	23dB min.
Insertion Loss	0.3dB max.
VSWR	1.15:1 max.
Temperature Range	-30 to +60C
Waveguide	WR112
Flanges	UBR84
Port 1	Normal Input
Port 2	Normal Output
Port 3	Normal Load Port
	Load not included

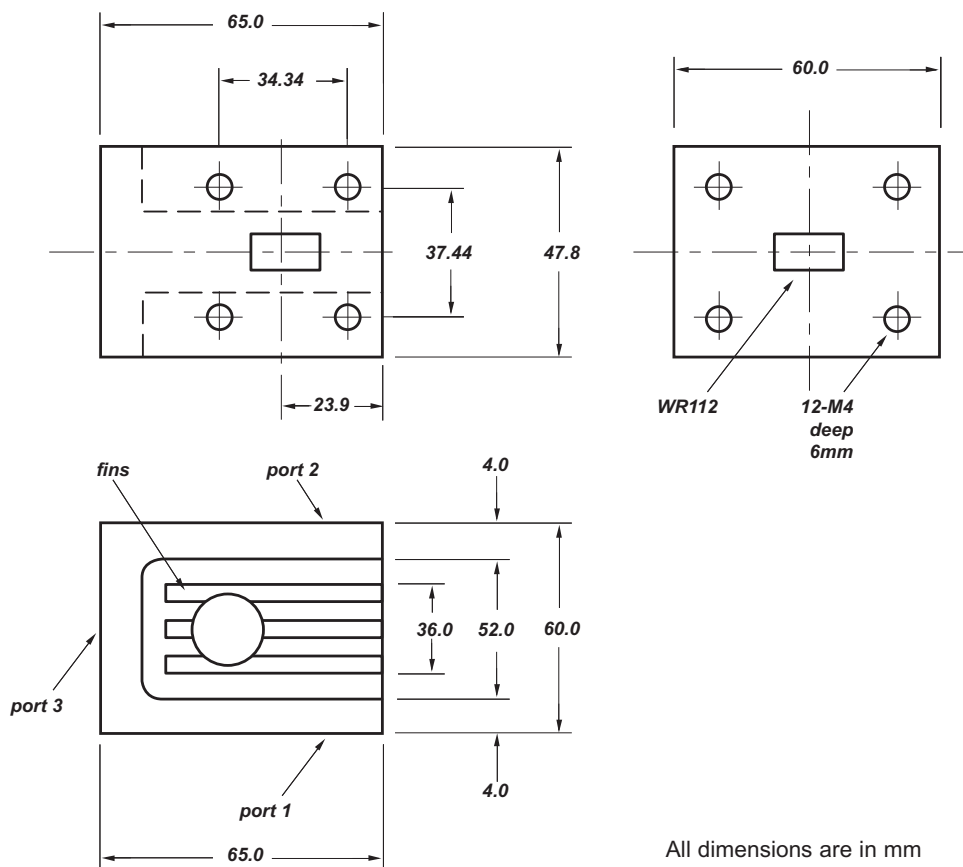

All dimensions are in mm

We reserve the right to change standard product specifications without notice but will be pleased to consider control drawings for quotation.

Passive Components